


KtecX25A 4 Pole Contactors

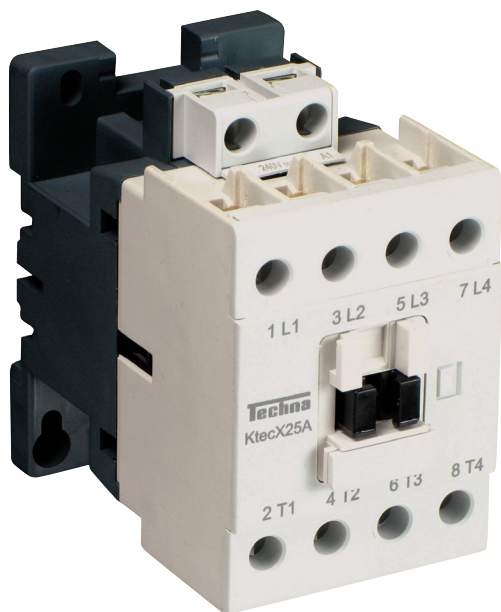

The KtecX25A is a 4 Pole Contactor rated at 40A (AC1).

In addition, there has been an improvement in the mechanical and electrical endurance of 50%.

KtecX25A Coil Parameters

Coil Inrush	75VA
Coil Constant	8-10VA
Power	2.4-2.6W
Pull In	67-73%
Drop Out	49-60%
Switching Time Pull In (ms)	14-16
Switching Time Drop Out (ms)	9-11

KtecX25A Technical Specification

IEC60947-4-1 EN60947-4-1 DIN VDE 0660	Power Rating AC3 (kW/A)		200/240V	7.5kW/28A	
			380/400V	11kW/28A	
			415V	11kW/25A	
			440V	11kW/25A	
			550V	15kW/23A	
			660V	15kW/18A	
			690V	15kW/17A	
	Current AC1 (A)			40	
UL508 CSA-C22.2	Power Rating AC3 (HP/A)	1-Phase	110-120V	2HP/24A	
			220-240V	3HP/17A	
		3-Phase	220-240V	7.5HP/22A	
			440-480V	15HP/21A	
			550-600V	15HP/17A	
	Current AC1 (A)			40	
	Main Contacts				4NO or 2NO/2NC
Mechanical Life				10,000,000	
Electrical Life (AC3)				1,500,000	
Maximum Ops/hr				1200	