POWtec CEE Panel Mounted Socket Outlets

IP54

- Splash-proof, IP54
- Screw terminals
- Brass contacts



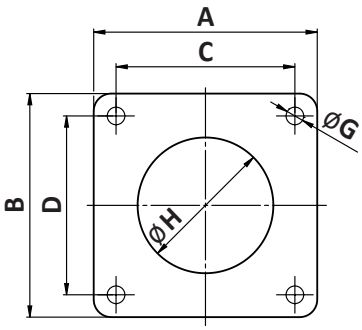

Maximum Conductor Cross-section		
Current Rating	Flexible	Solid
16A	4mm²	6mm²

Dimensions (mm)		
Poles	3	3ª
Current	16A	
A and B	60	55
C and D	47	44
E	21	28
F	55	46
G	5.5	4.5
H	43	43
Weight (g)	105	120

Voltage		110 V~	230 V~
Frequency		50/60 Hz	50/60 Hz
Designation		4h	3p = 6h 4p/5p = 9h
Current	Poles	Part No.	Part No.
16A	3	POWtecS-316Y-P0254	POWtecS-316B-P0254
16Aª	3	-	POWtecS-316B-P0354

ª = with 55 x 55mm Flange