


POWtec CEE Connectors IP67



- Waterproof, IP67
- Screw terminals
- Quick release locking system
- Nickel-plated contacts

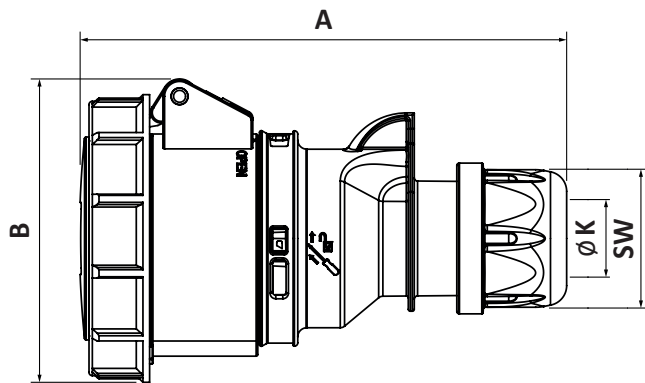

Maximum Conductor Cross-section		
Current Rating	Flexible	Solid
16A	4mm ²	6mm ²
32A	6mm ²	10mm ²

Dimensions (mm)						
Poles	3	4	5	3	4	5
Current	16A			32A		
A	133	139	147	163	163	171
B	78	84	92	96	96	102
K	6-15	6-15	8-16	11.5-20	11.5-20	11.5-22
SW	42	42	42	50	50	50
Weight (g)	155	186	227	275	292	338

Voltage		110 V~	230 V~	400 V~
Frequency		50/60 Hz		
Designation		4h		
Current	Poles	Part No.	Part No.	Part No.
16A	3	POWtecS-316Y-T067	POWtecS-316B-T067	-
16A	4	POWtecS-416Y-T067	POWtecS-416B-T067	POWtecS-416R-T067
16A	5	-	POWtecS-516B-T067	POWtecS-516R-T067
32A	3	POWtecS-332Y-T067	POWtecS-332B-T067	-
32A	4	POWtecS-432Y-T067	POWtecS-432B-T067	POWtecS-432R-T067
32A	5	-	POWtecS-532B-T067	POWtecS-532R-T067