

RelayS Slim Interface Relays




RelayS consist of a:

- Screw Terminal Universal Socket
- Electromagnetic Miniature Operational Relay

The RelayS is a slim interface relay with 1 changeover contact, having a width of 6.2mm. Suitable for industrial and general purpose applications. Available in a wide range of coil voltages from 12 - 240Vac and 6 - 24Vdc.

- Available with 1 Changeover Contact
- Rated Current 6A
- With a width of 6.2mm
- For 35mm Rail Mount according to EN 60715
- Equipped with Movable Ejector and Green LED
- Approvals: CE, cULus, EAC

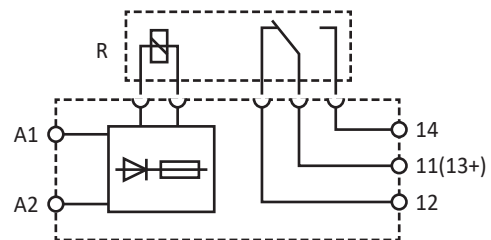

RelayS Technical Specification

Output Circuit - Contacts		
Number of Contacts		1CO
Contact Material		AgSnO ₂
Max. Switching Voltage		400Vac / 250Vdc
Rated Current		6A
Max. Breaking Capacity	AC1	1500VA
Contact Resistance		≤ 100mΩ
Max. Operational Frequency	at Rated Load AC1	360 Cycles/hour
	No Load	72000 Cycles/hour
Input Circuit		
Rated Voltage	DC	6, 12, 24V
	AC/DC (AC: 50/60Hz)	12, 24, 48, 60, 110 ... 125, 220 ... 240V
Rated Power Consumption		AC: 0.2-0.4VA / DC: 0.2-0.4W
Ambient Temperature Range (Storage & Operating)		-40 ... +70°C
Other Data		
Mechanical Life (Cycles)		> 10 ⁷
Body Dimensions (L x H x W)		88.6 x 76 x 6.2mm

RelayS Ordering Scheme

