




Techna STRAIGHTENERS (WIRE & STRIP)

PR - Precision Straightener with Individually Adjustable Rollers

Highly adjustable with moveable centre line and close roll spacing. Interlocking bar construction for superior accuracy.

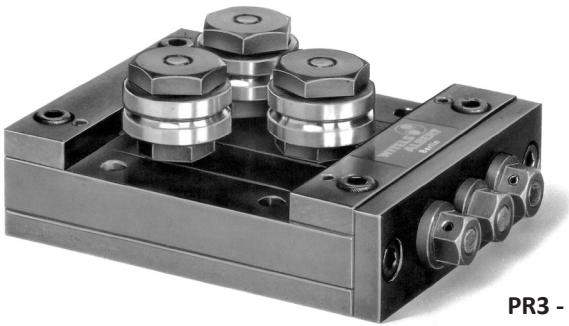

PR3 - Three Roll Unit

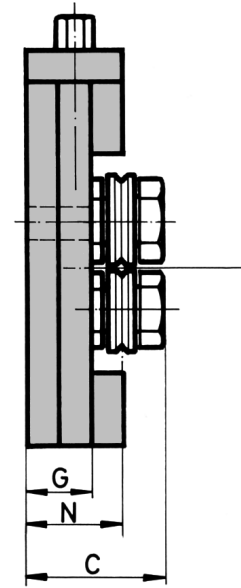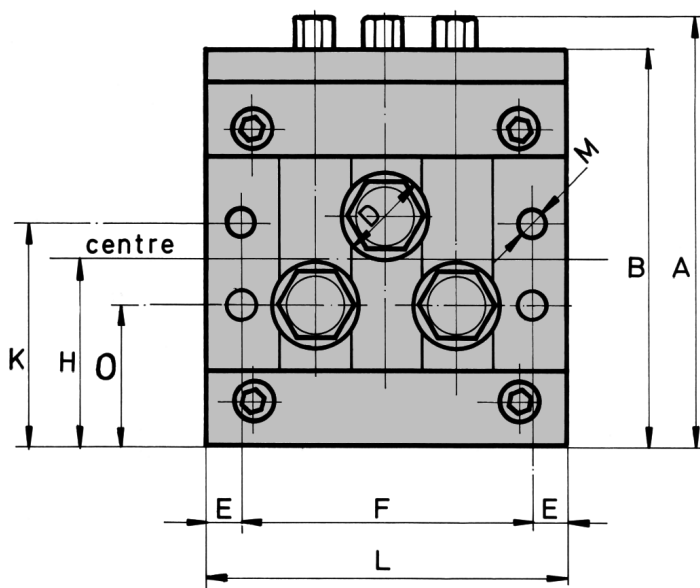

PR Series	Wire Diameter Ranges (mm) ϕ								
	</= 0.3	0.3 - 0.5	0.5 - 0.9	0.9 - 1.5	1.5 - 3.0	3.0 - 5.0	5.0 - 7.0	7.0 - 9.0	9.0 - 15.0
Common Measurements									
A	46.5	47	81	107	130	160	202	202	344
B	45	45	76	98	118	148	190	190	320
C	14.5	16.5	29.5	36.5	49	52	65	68	86
D	4	7	17	23	31	40	52	62	80
E	4	4	6	7	10	9	12.5	12.5	25
G	11	11	16	20	23	23	30	30	40
H	20	20	35	45	55	70	90	90	150
K	20	20	49	65	80	100	135	135	210
M	3.5	3.5	5.5	6.6	6.6	9	9	9	17
N	12	13	22	27	36	36	47.3	45.8	58.5
O	-	-	21	25	30	40	45	45	90
Rolls	WR4	WR7	WR17	WR23	WR31	WR40	WR520	WR62	WR800
3 Roll	PR3-0.3	PR3-0.5	PR3-0.9	PR3-1.5	PR3-3.0	PR3-5.0	PR3-7.0	PR3-9.0	PR3-15.0
F	24	30	48	76	80	107	175	175	290
L	32	38	60	90	100	125	200	200	340
Kg	0.1	0.2	0.6	1.6	2.5	4	8.7	9	45
5 Roll	PR5-0.3	PR5-0.5	PR5-0.9	PR5-1.5	PR5-3.0	PR5-5.0	PR5-7.0	PR5-9.0	PR5-15.0
F	32	42	68	112	120	157	275	275	450
L	40	50	80	126	140	175	300	300	500
Kg	0.2	0.2	0.8	2.3	2.7	5.8	13.3	16.5	62
7 Roll	PR7-0.3	PR7-0.5	PR7-0.9	PR7-1.5	PR7-3.0	PR7-5.0	PR7-7.0	PR7-9.0	PR7-15.0
F	40	54	88	148	160	207	375	375	610
L	48	62	100	162	180	225	400	400	660
Kg	0.2	0.3	1.1	3	4.7	7.5	17.9	19.8	79