PS - Precision Straightener with Individually Adjustable Rollers and Quick Release

Highly adjustable with moveable centre line, close roll spacing and quick release. Interlocking bar construction for superior accuracy.

PS3 - Three Roll unit

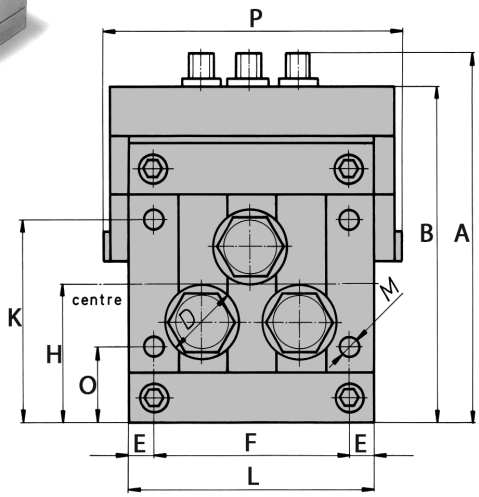

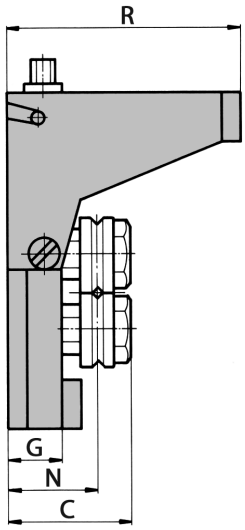

PS Series	Wire Diameter Ranges (mm) Ø								
	</ = 0.3	0.3 - 0.5	0.5 - 0.9	0.9 - 1.5	1.5 - 3.0	3 .0 - 5.0	5.0 - 7.0	7.0 - 9.0	9 .0 - 15.0
Common Measurements									
A	51.5	52	91	119	145	180	227	227	384
B	50	50	86	110	133	168	215	215	360
C	14.5	16.5	29.5	36.5	49	52	65	68	86
D	4	7	17	23	31	40	52	62	80
E	4	4	6	7	10	9	12.5	12.5	25
G	11	11	16	20	23	23	30	30	40
H	20	20	35	45	55	70	90	90	150
K	20	20	49	65	80	100	135	135	210
M	3.5	3.5	5.5	6.6	6.6	9	9	9	17
N	12	13	22	27	36	36	47.3	45.8	58.5
O	-	-	21	25	30	40	45	45	90
R	40	40	60	95	120	160	200	200	300
Rolls	WR4	WR7	WR17	WR23	WR31	WR40	WR520	WR62	WR800
3 Roll	PS3-0.3	PS3-0.5	PS3-0.9	PS3-1.5	PS3-3.0	PS3-5.0	PS3-7.0	PS3-9.0	PS3-15.0
F	24	30	48	76	79.5	107	175	175	290
L	32	38	60	90	99.5	125	200	200	340
P	40	46	72	106	115.5	145	224	224	370
Kg	0.2	0.3	1.0	2.2	3.4	5.2	10.7	11	48
5 Roll	PS5-0.3	PS5-0.5	PS5-0.9	PS5-1.5	PS5-3.0	PS5-5.0	PS5-7.0	PS5-9.0	PS5-15.0
F	32	42	68	112	119.5	157	275	275	450
L	40	50	80	126	139.5	175	300	300	500
P	48	58	92	142	155.5	195	324	324	530
Kg	0.3	0.3	1.2	2.9	4.6	7	15.3	16.4	65
7 Roll	PS7-0.3	PS7-0.5	PS7-0.9	PS7-1.5	PS7-3.0	PS7-5.0	PS7-7.0	PS7-9.0	PS7-15.0
F	40	54	88	148	159.5	207	375	375	610
L	48	62	100	162	179.5	225	400	400	660
P	56	70	112	178	195.5	245	424	424	690
Kg	0.3	0.4	1.5	3.6	5.6	8.7	19.9	21.8	82