

# RG-Series

## SINGLE/DOUBLE POLE ROCKER & PADDLE SWITCHES

The double pole version of the R-Series incorporates the same sleek lines as the original Corvette, in a double pole envelope. Features include silver-plated butt-action contacts which afford ratings to 20A/125, 15A 250VAC and withstand peak inrush currents up to 100 amps. Paddle or rocker actuators and a choice of solder lug, .250 Tab and wire lead terminations enable this switch to adapt to high current applications.



### Product Highlights:

- Ratings to 20A
- UL, CSA and VDE approved
- Rocker or Paddle actuators
- Fits Euro or American standard mounting holes

### Typical Applications:

- Power Supply
- Appliance
- Exercise Equipment
- Music Equipment



### Dielectric Strength

UL/CSA: 1000V - live to dead metal parts & opposite polarity  
 VDE: 4000V - live to dead metal parts;  
 1250V - opposite polarity & across open contacts

### Electrical Life

50,000 cycles

### Operating Temperature

-40°F to 185°F (-40°C to 85°C)

**RGSCA901 - R - B - B - A**

<sup>1</sup> Base Part Number

<sup>2</sup> Actuator Style

<sup>3</sup> Actuator Color

<sup>4</sup> Bezel Color

<sup>5</sup> Rocker Legend

#### 1 BASE PART NUMBER: SERIES / CIRCUITRY / RATING <sup>1</sup> / TERMINATION

15A 250 VAC, 20A 125 VAC, 3/4 HP 125-250 VAC, 14(6)A 250 VAC

Solder Lugs .250 Tabs Wire Leads

##### Standard Base

OFF-NONE-ON (Single Pole)	RGSCA900	RGSCA901	RGSCA905
ON-NONE-ON (Single Pole)	RGSCB900	RGSCB901	RGSCB905
OFF-NONE-ON (Double Pole)	RGSCC900	RGSCC901	RGSCC905
ON-NONE-ON (Double Pole)	RGSCD900	RGSCD901	RGSCD905

##### European Base (22 x 30 mm cutout)

OFF-NONE-ON (Single Pole)	RGSEA900	RGSEA901	RGSEA905
ON-NONE-ON (Single Pole)	RGSEB900	RGSEB901	RGSEB905
OFF-NONE-ON (Double Pole)	RGSEC900	RGSEC901	RGSEC905
ON-NONE-ON (Double Pole)	RGSED900	RGSED901	RGSED905

#### 2 ACTUATOR STYLE

P Paddle	R Rocker
----------	----------

#### 3 ACTUATOR COLOR <sup>1</sup>

B Black	W White
---------	---------

#### 4 BEZEL COLOR <sup>1</sup>


B Black	W White
---------	---------

#### 5 ROCKER LEGEND

NO LEGEND	hot stamp
OFF-ON vertical	O
OFF-ON horizontal	A
O-I horizontal	B
O-I vertical	D
Dual OFF-ON, O-I vertical	E
Dual OFF-ON, O-I horizontal	H
	J

Notes:

<sup>1</sup> Additional ratings, colors and clear style actuators are available. Consult factory.

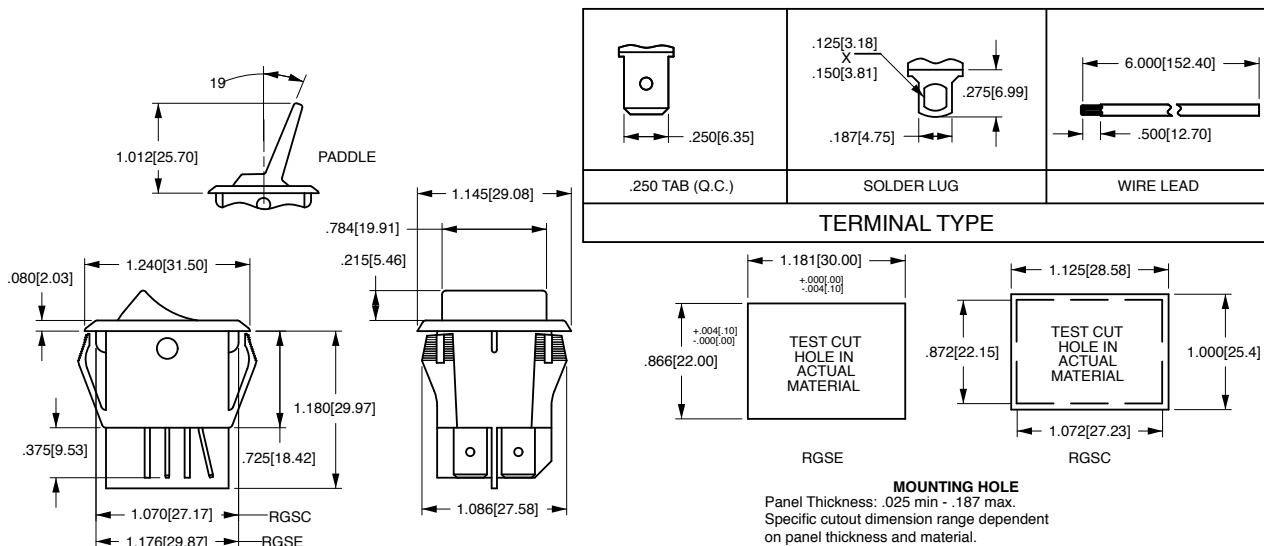

\*Manufacturer reserves the right to change product specification without prior notice.